


PACK CONTROLLER SERIAL DATA BUS 240 V 1 ph  
50 Hz 1 A

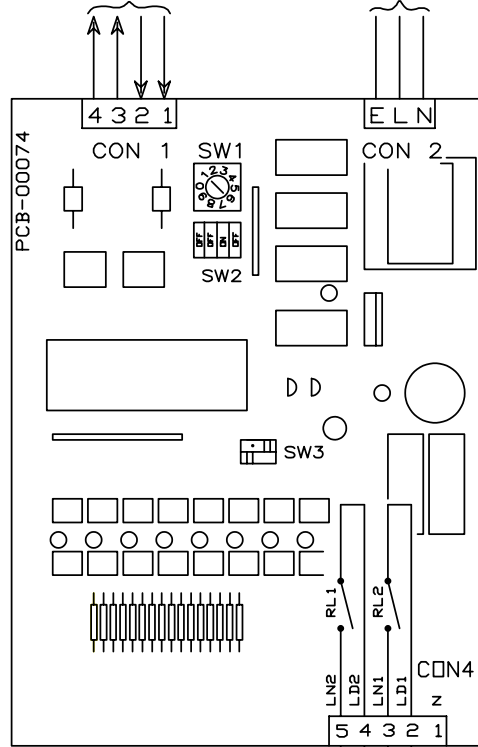

TYPE 'IF2'  
COMPRESSOR  
INTERFACE

NO HT SYSTEM ON DEFROST  
NO LT SYSTEM ON DEFROST

- NOTES
1. TO ENSURE THAT INTERNALLY FITTED SUPPRESSORS WORK CORRECTLY, CONNECT LINE VOLTAGES TO TERMINALS PREFIXED 'LN' AND THE CORRESPONDING LOADS TO TERMINALS PREFIXED 'LD'.
  2. SWITCH SETTINGS.  
THE POSITION OF THE DP SWITCH 'SW2' MUST BE SET AS SHOWN (IE: DOT SHOWING CLOSED CONTACT ON SECOND FROM LEFT) FOR THE CARD TO OPERATE CORRECTLY.
- SWITCHES 'SW3' CONTROL THE OUTPUT RELAYS IF PACK SERIAL DATA BUS COMMUNICATIONS FAIL. (CLOSED 'DOT SHOWING' = RELAY ENERGISED).

**JTL SYSTEMS LTD.**  
41 KINGFISHER COURT, HAMBRIDGE RD,  
NEWBURY, BERKSHIRE, RG14 5SJ  
TEL: 0635-47585 FAX: 0635-31888

ISSUE	DESCRIPTION	APP'D	DATE
2	TITLE CORRECTED	DLT	04/94
1	ORIGINAL ISSUE	PT	01/93

TITLE: INTERFACE WIRING  
FOR DEFROST GROUP OUTPUT  
TYPE: IF2-2L

PROJ.	DRG No	SHT	OF	ISS.
CP	00594	1	1	2