


PACK CONTROLLER SERIAL DATA BUS 240 V 1 ph
50 Hz 1 A

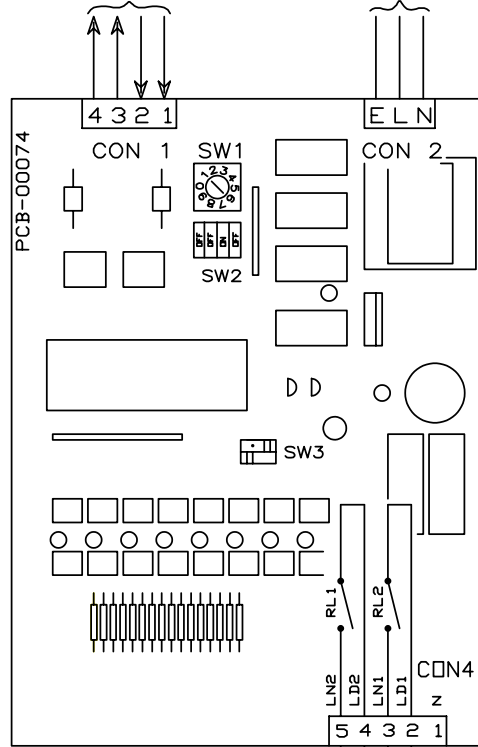

TYPE 'IF2'
COMPRESSOR
INTERFACE

NO HT SYSTEM ON DEFROST
NO LT SYSTEM ON DEFROST

- NOTES
1. TO ENSURE THAT INTERNALLY FITTED SUPPRESSORS WORK CORRECTLY, CONNECT LINE VOLTAGES TO TERMINALS PREFIXED 'LN' AND THE CORRESPONDING LOADS TO TERMINALS PREFIXED 'LD'.
 2. SWITCH SETTINGS.
THE POSITION OF THE DP SWITCH 'SW2' MUST BE SET AS SHOWN (IE: DOT SHOWING CLOSED CONTACT ON SECOND FROM LEFT) FOR THE CARD TO OPERATE CORRECTLY.
- SWITCHES 'SW3' CONTROL THE OUTPUT RELAYS IF PACK SERIAL DATA BUS COMMUNICATIONS FAIL. (CLOSED 'DOT SHOWING' = RELAY ENERGISED).

JTL SYSTEMS LTD.
41 KINGFISHER COURT, HAMBRIDGE RD,
NEWBURY, BERKSHIRE, RG14 5SJ
TEL: 0635-47585 FAX: 0635-31888

ISSUE	DESCRIPTION	APP'D	DATE
2	TITLE CORRECTED	DLT	04/94
1	ORIGINAL ISSUE	PT	01/93

TITLE: INTERFACE WIRING
FOR DEFROST GROUP OUTPUT
TYPE: IF2-2L

PROJ.	DRG No	SHT	OF	ISS.
CP	00594	1	1	2