


TA230 TEMPERATURE MONITOR

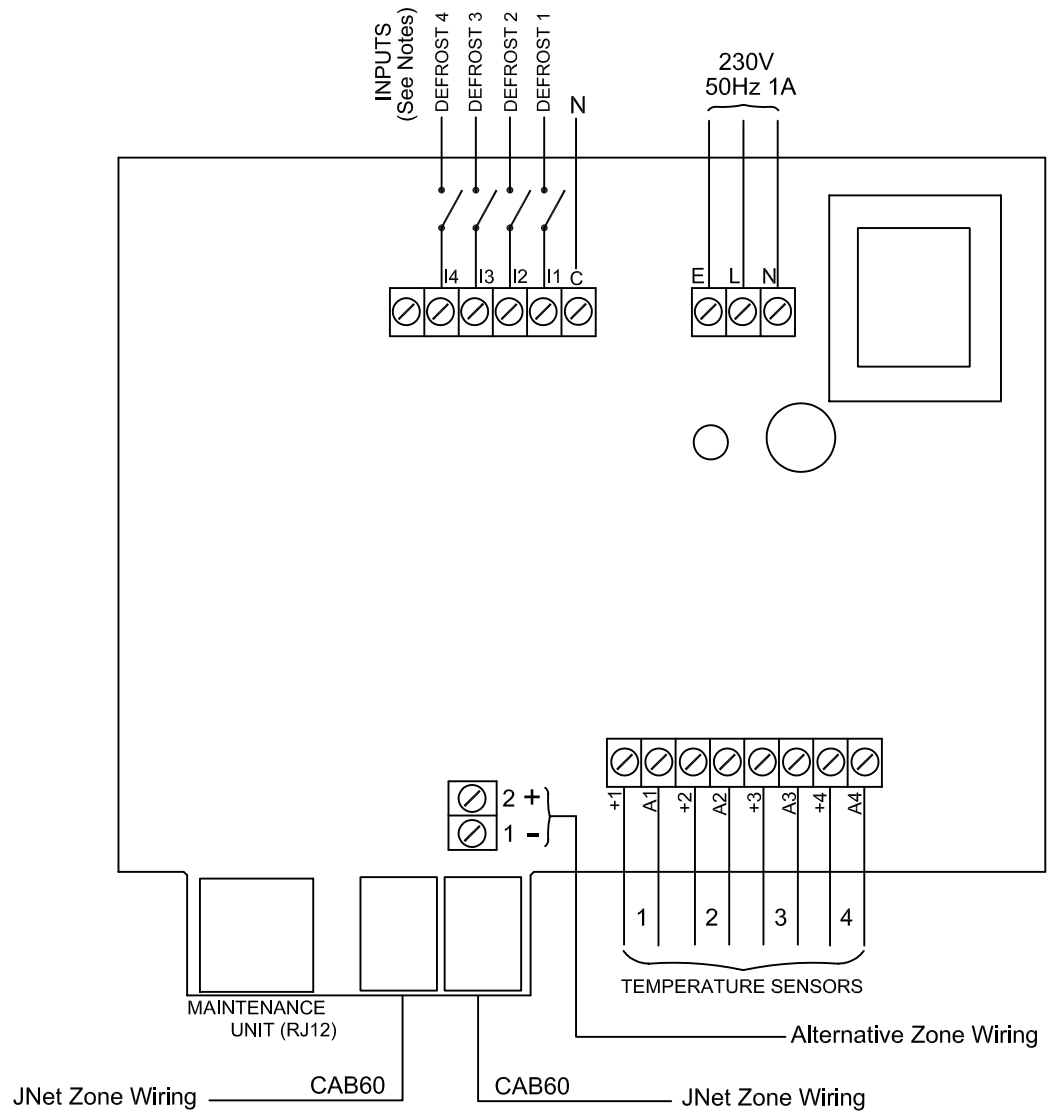


NOTE:

INPUTS ARE 230V OPTICALLY ISOLATED IN THE TA230.

THIS UNIT IS SUITABLE FOR SINGLE PHASE 230V OPERATION ONLY.

i.e INPUTS MUST BE ON THE SAME PHASE AS SUPPLY.



JTL SYSTEMS LTD
 41 KINGFISHER COURT, HAMBRIDGE RD,
 NEWBURY, BERKSHIRE: RG14 5SJ
 TEL: 01635 263646 FAX: 01635 263647

ISSUE	DESCRIPTION	APP'D	DATE
3	AMENDED	MJK	01/15
2	UPDATED CONNECTOR REFERENCES	MJK	01/14
4	ADDED NOTE FOR INPUTS	MJK	01/18

TITLE:
**TA230 TEMPERATURE MONITOR
 CONNECTION DIAGRAM**

PROJ.	DRG No: 03331	SHT	OF	ISS.
		1	1	4

THIS IS AN UNCONTROLLED COPY - UNLESS STAMPED WITH CONTROLLED COPY STAMP