
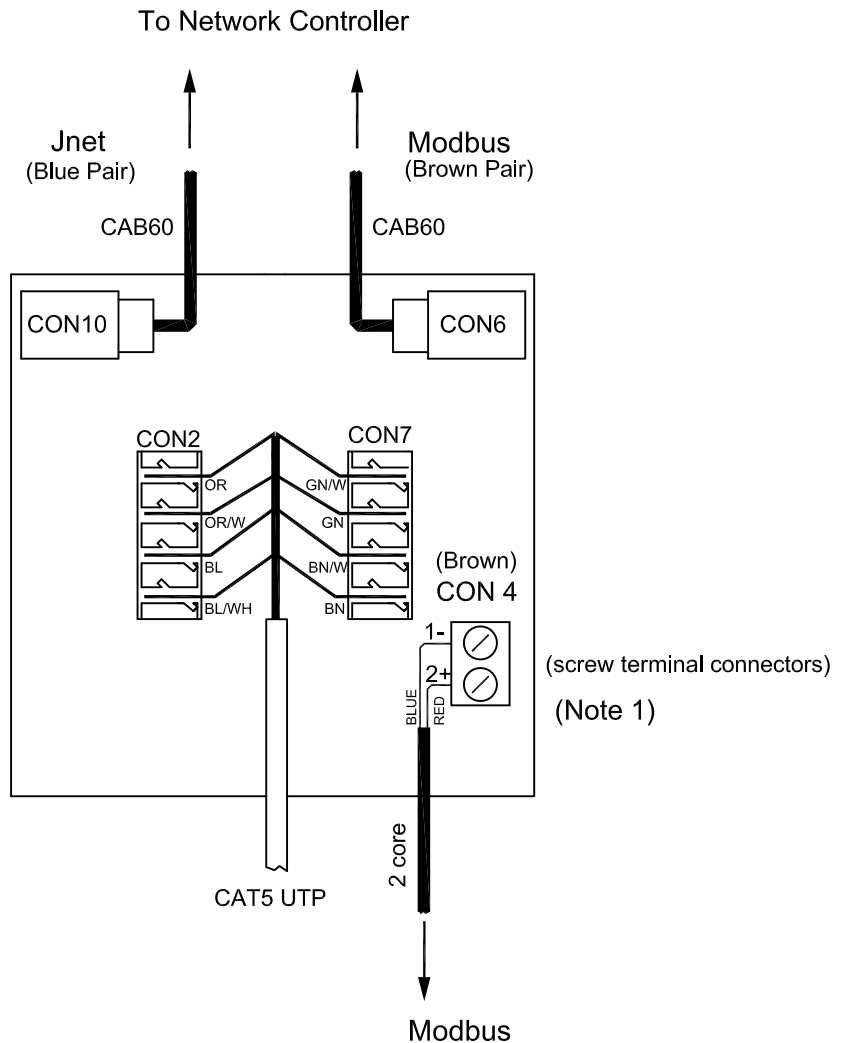


NJ33 \ NJ33D CONNECTIONS

NJ33D
DIN RAIL
MOUNTED

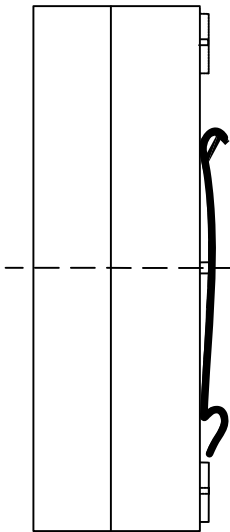

Junction will connect between all of the following:
 2 x CAB60 (RJ8 connectors)
 1 x CAT5 UTP (IDC connectors)
 1 x 2 core cable (Screw terminal connectors)

NOTE:

1. Connections made to screw terminals connections should be made using unscreened 2 core cable. (eg 7/0.2-2)
 If screened cable is used, the screen should ONLY be connected to earth at one end or left unconnected.
 (UNDER NO CIRCUMSTANCES SHOULD THE SCREEN BE CONNECTED AT BOTH ENDS)
 The flexible cable should be terminated in the correct size of boot-lace ferrule.
2. The Junction box is available in two version with (NJ33D) and without (NJ33) DIN rail mounting clips.

THIS IS AN UNCONTROLLED COPY - UNLESS STAMPED WITH CONTROLLED COPY STAMP

ISSUE	DESCRIPTION	APP'D	DATE
1	ADDED NJ33	SzN	04/19
1	ORIGINAL ISSUE	SzN	09/18



JTL SYSTEMS LTD.
 41 KINGFISHER COURT, HAMBRIDGE RD,
 NEWBURY, BERKSHIRE. RG14 5SJ
 TEL: 01635-263646 FAX: 01635 263647

TITLE: **NJ33 \ NJ33D CONNECTION**

DRG TYPE: **CONNECTION DIAGRAM**

PROJ:	DRG No:	SHT	OF	ISS.
	05139	1	1	2