


**SITE PC TO NETWORK CONTROLLER CONNECTION DIAGRAM
USING 3 x CATEGORY 5 LINK**

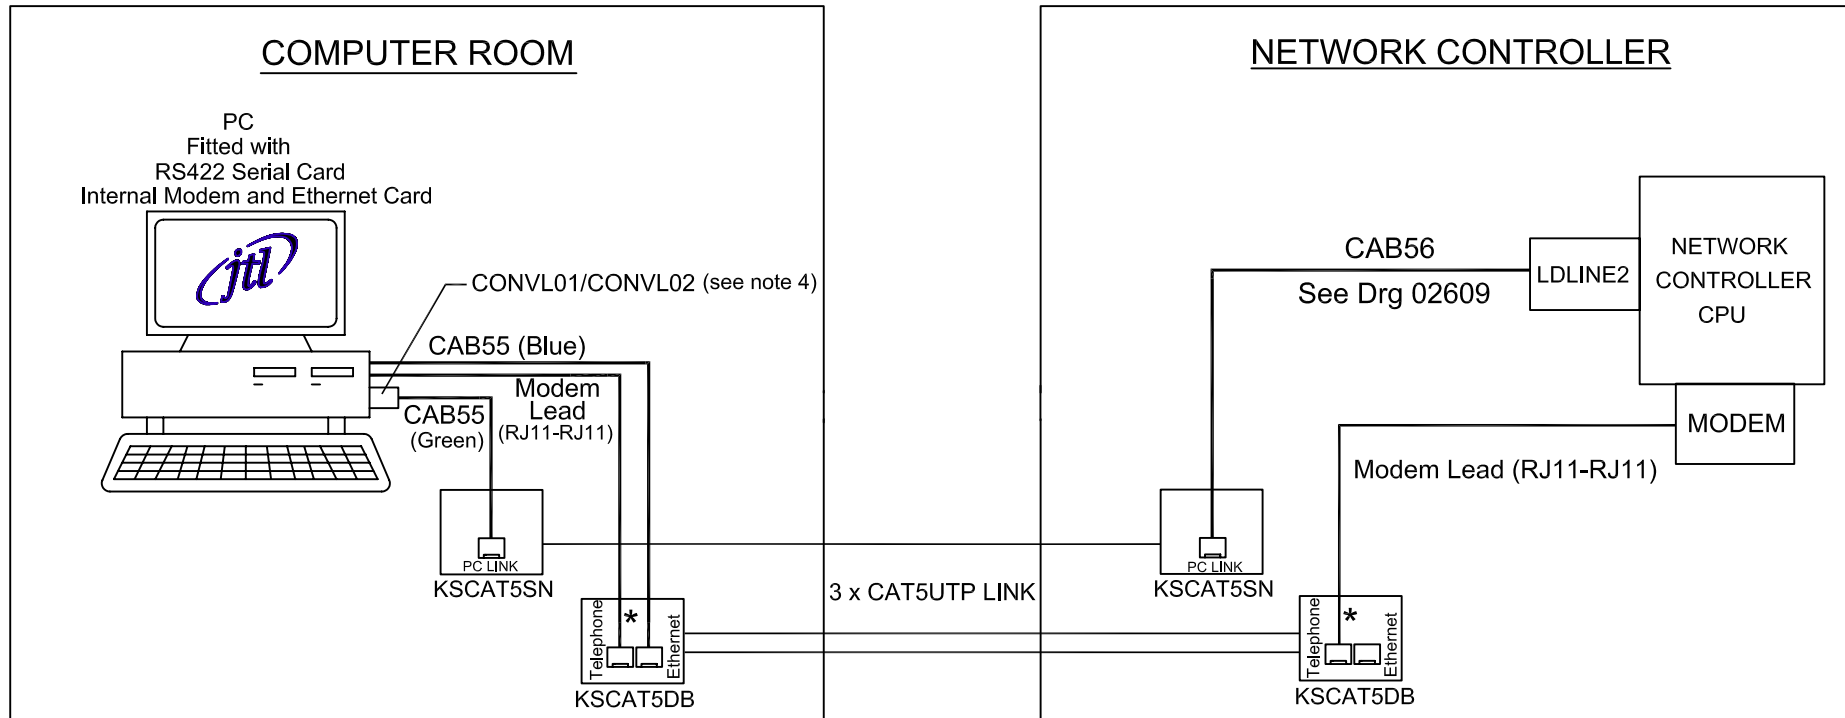

* RJ11 Plug fits into the centre of an RJ45 Socket without need for BT adapter.

NOTES:

1. Single RJ45 Socket should always be used for the RS422 direct connection to Network Controller. Double RJ45 Socket used for Telephone, on the left, and Ethernet on the right.
2. All Sockets are to be wired according to TIA568B colour scheme see drawing 02718.
3. Sockets should also be labelled according to function.
4. Use CONVL01 where "B & B Electronics" RS422 Card fitted and CONVL02 where "BRAINBOXES" RS422 Card fitted.
5. Where Brainboxes card fitted, neither of the two jumpers (on the card) should be fitted.



JTL SYSTEMS LTD
41 KINGFISHER COURT, HAMBRIDGE RD,
NEWBURY BERKSHIRE: RG14 5SJ
TEL: 01635 263646 FAX: 01635 263647

THIS IS AN UNCONTROLLED COPY - UNLESS STAMPED WITH CONTROLLED COPY STAMP

Doc 02720 ISS 3 Feb 2003